

**NO CRIMP UNIDIRECTIONAL FABRIC:**

- Direct Translation of Properties
- Highly Efficient
- Very Affordable

**UNI-Q-22.3-SM**

**FABRIC:** Unidirectional

**RAW MATERIAL:** T700 24K 50C (Toray)

**LINK TO CARBON FIBER DATASHEET**

**FABRIC WIDTH:** 12"

**BRAID YIELD:** 6.5 yd/lb (4.3 m/kg)


**AREAL WEIGHT:** 756 GSM

**LAYER THICKNESS:** (@50%FV): .030" (.76 mm)

**STANDARD FABRIC TOLERANCES**

**YIELD TOLERANCE:** +/-5%

**ANGLE TOLERANCE:** +/-3°

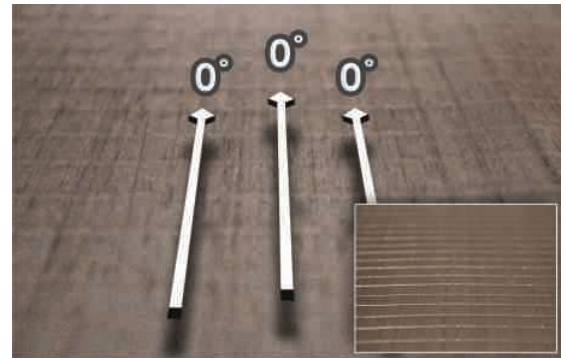

**STANDARD PACKAGING ON 6" CORES**

**Better With Braid.**<sup>®</sup>

For more information, please visit [www.braider.com](http://www.braider.com) OR contact a sales rep at [sales@braider.com](mailto:sales@braider.com) or 513-688-3200